




超紧凑、长寿命、成本低，操作简单
用于科学实验、光学仪器、光学传感器、测量、通信、频谱分析等。

波长Wavelength (nm)	639±1	
工作方式 Working Mode	CW	
输出功率 Output Power (mW)	>1,10, 20, ..., 400	>400, 500, ..., 1000
功率稳定性Power Stability(rms, over 4 hours)	<1%, <2%, <3%	<2%, <3%
横模 Transverse	TEM00	
线宽Spectral Linewidth (nm)	<0.2 (< 0.003 optional)	<0.2
光束质量Beam Quality (M2 factor)	<1.2(<1.1 optional)	<1.2
光束直径Beam Diameter at Aperture (mm)	<1.0	
光束发散角Beam Divergence (full angle, mrad)	<1.5	
偏振比Polarization Ratio	>100:1 Horizontal±5 degree (Vertical Optional)	
预热时间Warm-up Time (minutes)	<10	
出光孔高度 Aperture Position (mm)	50	
尺寸 Dimensions (L×W×H, mm)	180x 50 x 63.5	
工作温度Operation Temperature (°C)	10~35	
使用寿命Expected Lifetime (hours)	10000	
保修期Warranty Time	1 year	

激光器机械尺寸图:

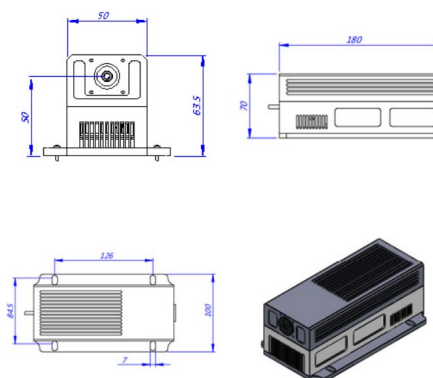

激光电源尺寸图:

