




波长Wavelength (nm)	640±5	出光孔高度 Aperture Position (mm)	51.5
工作方式 Working Mode	CW	工作温度Operation Temperature (°C)	10~35
输出功率 Output Power (mW)	>1300, 1400, ..., 2000	尺寸 Dimensions (L×W×H, mm)	160 x 60 x 65
功率稳定性Power Stability(rms, over 4 hours)	<1%, <2%, <3%	可配电源型号 Integrated Driver Model	VD-II-Q
光束直径Beam Diameter at Aperture (mm)	~3.5×4	使用寿命Expected Lifetime (hours)	10000
光束发散角Beam Divergence (full angle, mrad)	<1.0	保修期Warranty Time	1 year
预热时间Warm-up Time (minutes)	<5		

超紧凑、长寿命、成本低，操作简单
用于科学实验、光学仪器、光学传感器、测量、通信、频谱分析等。

激光器机械尺寸图:

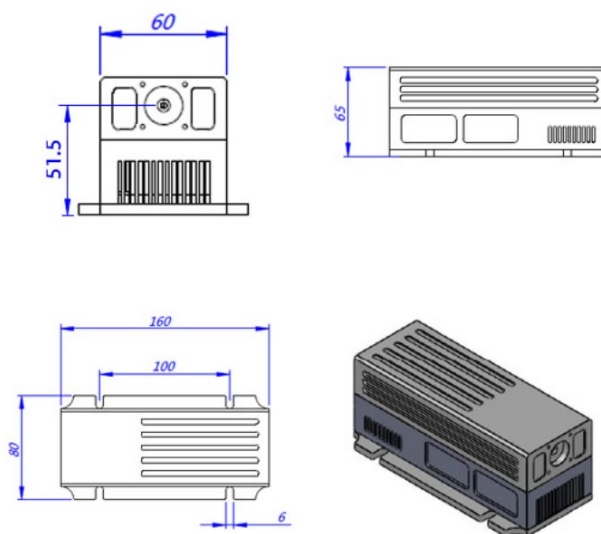

激光电源尺寸图:

