




波长Wavelength (nm)	642±5	出光孔高度 Aperture Position (mm)	90
工作方式 Working Mode	CW	工作温度Operation Temperature (°C)	10~35
输出功率 Output Power (mW)	2000, 3000, 4000	尺寸 Dimensions (L×W×H, mm)	320 x 112 x 109
功率稳定性Power Stability(rms, over 4 hours)	<1%, <2%, <3%	可配电源型号 Integrated Driver Model	VD-II-Q
光束直径Beam Diameter at Aperture (mm)	~5×4	使用寿命Expected Lifetime (hours)	10000
光束发散角Beam Divergence (full angle, mrad)	<2.6×1.2	保修期Warranty Time	1 year
预热时间Warm-up Time (minutes)	<5		

功率稳定、可调节
电源自带过热、限流保护电路
可外接高速调制

适用于科研、医疗、生物工程、舞台激光表演、激光切割、激光精密焊接等

激光器机械尺寸图:

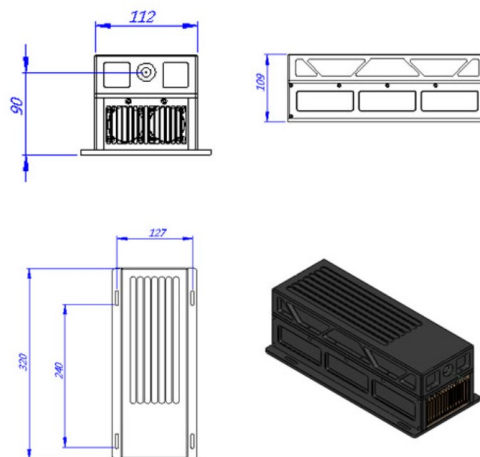

激光电源尺寸图:

